

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T1S R3W

SEC 34

SEC 3

T2S

U.S.B.&M.

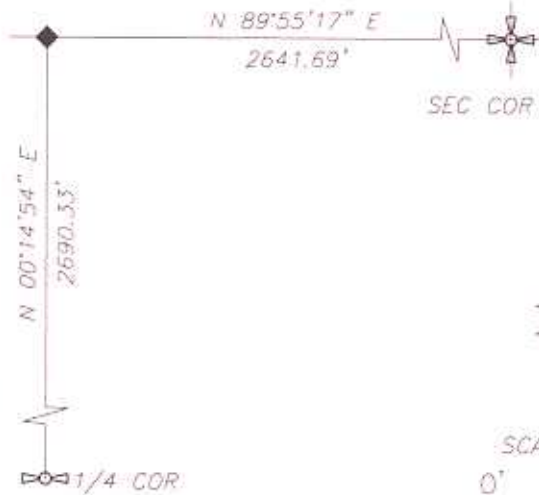

NOTE

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (X CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ALUMINUM CAP WITH 5/8" REBAR 0.3 FEET BELOW THE SURFACE OF COUNTY ROAD

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED MONUMENT INTO VRS CONTROL NETWORK

STATE PLANE COORDINATE DATA (U.S. SURVEY FEET)

UTAH CENTRAL ZONE

N:7296955.047
E:2000264.368

LATITUDE: 40°20'41.626" N

LONGITUDE: 110°12'32.165" W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 440700

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

SCANNED

2005

